

(19) World Intellectual Property Organization  
International Bureau




(43) International Publication Date  
21 December 2000 (21.12.2000)

PCT

(10) International Publication Number  
WO 00/76298 A1

- (51) International Patent Classification<sup>7</sup>: A01J 5/04, 5/08, F16L 35/00
- (21) International Application Number: PCT/SE00/01180
- (22) International Filing Date: 7 June 2000 (07.06.2000)
- (25) Filing Language: Swedish
- (26) Publication Language: English
- (30) Priority Data:  
9902183-4 10 June 1999 (10.06.1999) SE
- (71) Applicant (for all designated States except US):  
DELAVAL HOLDING AB [SE/SE]; P.O. Box 39,  
S-147 21 Tumba (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ÄLVEBY, Nils  
[SE/SE]; Anders Reimers väg 13, S-117 50 Stockholm  
(SE).
- (74) Agents: BERGLUND, Stefan et al.; Bjerkéns Patentbyrå  
KB, Östermalmsgatan 58, S-114 50 Stockholm (SE).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ,  
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (util-  
ity model), DE, DE (utility model), DK, DK (utility model),  
DM, EE, EE (utility model), ES, FI, FI (utility model), GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP,  
KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG,  
US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,  
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— With international search report.
- For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: A HOSE DEVICE

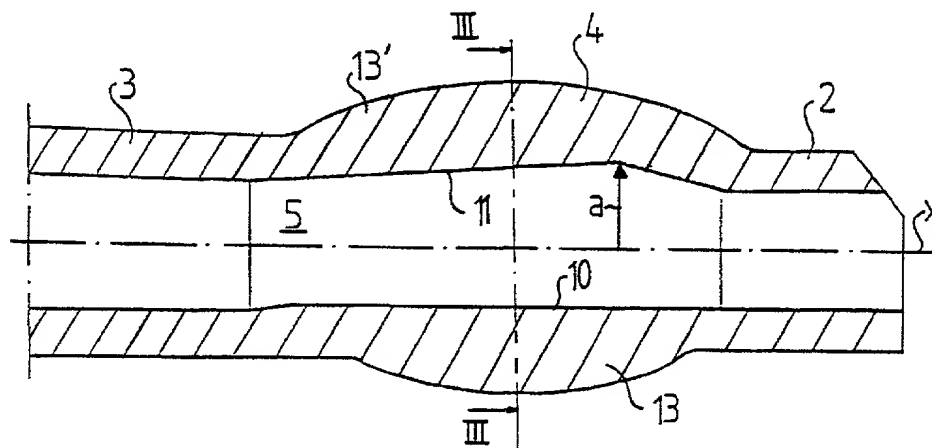

(57) Abstract: A hose device includes a hose portion (3), at least a first end portion (2) and a channel (5) which extends along the hose device (1) through the first end portion and the hose portion. The hose device has flexible and elastic properties. The first end portion (2) of the hose device is in a mounted state arranged to be attached to a tubular connection member (7) by having the connection member introduced in the channel (5). The hose device has a transition portion (4), which is located between the first end portion (2) and the hose portion (3). The channel (5) thus extends also through the transition portion and has, at the transition portion (4), in a non-mounted state a non-circular cross-sectional shape and in the mounted state a substantially circular cross-sectional shape, which permits a free liquid flow through the channel (5).

WO 00/76298 A1